


- 1 — UR
 - 2 — LR
 - 3 — SENSE
 - 4 — UL
 - 5 — LL
- PIN ASSIGNMENT

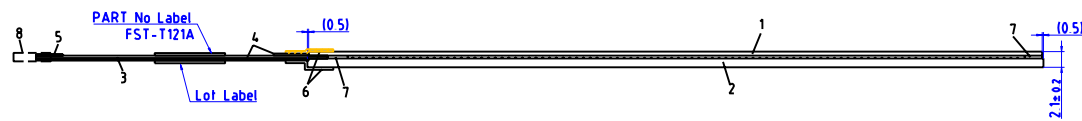

| REMARKS | |
|---|-------------------|
| TAIL PATTERN PITCH | 2.54mm |
| TAIL PATTERN WIDTH | Cu 1.6mm |
| | - mm |
| CIRCUIT PATTERN WIDTH | Ag 1.5mm to 2.5mm |
| | - mm |
| O RED TOP CIRCUIT. BLUE&GREEN BOTTOM CIRCUIT. | |
| O PURPLE TOP CIRCUIT | |
| O φ 0.15 DOT SPACER ON BOTTOM SHEET | |
| O TOLERANCE=0.5mm EXCEPT WHERE INDICATED | |

| ITEM | MATERIAL | REMARKS |
|------|---|---------|
| 1 | ITO FILM POLYESTER 175μm | |
| 2 | ITO GLASS T=1.9mm | |
| 3 | FPC POLYIMIDE 25μm | |
| 4 | REINFORCEMENT FILM POLYESTER 25μm | |
| 5 | STIFFENER POLYESTER 50μm | |
| 6 | TAIL PROTECTION TAPE POLYESTER 25μm | |
| 7 | ADHESIVE SHEET POLYESTER 75μm | |
| 8 | CONNECTOR AMP, 5 PIN CONNECTOR 487526-4 | |

| PART No | | APPROVED | CHECKED | CHECKED | TRACED | DESIGNED |
|---------------|------------------|-----------|----------------------|---------|-----------|----------|
| FST-T121A1101 | | Aug/18/05 | | | Aug/05/05 | |
| | | MATSUG | | | MOUE | FUJITA |
| Aug/05/05 | CONNECTOR CHANGE | MOUE | TYPE | | | |
| May/20/05 | FIRST EDITION | MOUE | STANDARD TOUCHSCREEN | | | |
| DATE | REVISION | NAME | CIRCUIT DRAWING | | | |
| | | | DMC Co., Ltd. | | | |

UNIT = mm